




# Approximate dimensions of self-equalized Thrust pad bearings

(Dimension can be modified acc. to customer require → "custom design")

Pad height	Min. total width of bearing (B)	6 pads			7 pads			8 pads			9 pads		
		ID	OD	D	ID	OD	D	ID	OD	D	ID	OD	D
26	26	40	92	105	51	103	118	62	114	128	74	126	142
28,5	28	44	101	116	56	113	129	68	125	141	80	137	154
31	30	48	110	126	61	123	141	74	136	153	87	149	168
34	32	52	120	138	66	134	154	80	148	167	95	163	184
37	36	58	132	151	73	147	169	89	163	184	105	179	202
40	38	61	141	162	78	158	181	95	175	197	111	191	215
44	42	68	156	179	87	175	201	106	194	213	125	213	234
48,5	45	73	170	195	94	191	219	114	211	232	134	231	254
53	50	80	186	213	103	209	240	125	231	254	147	253	278
58	53	87	203	233	111	227	261	135	251	276	159	275	302
63	60	95	221	254	122	248	285	148	274	301	175	301	331
68,5	64	103	240	266	131	268	297	160	297	321	189	326	352
75	68	111	261	289	142	292	324	173	323	349	204	354	383
82	72	122	286	317	156	320	355	190	354	383	225	389	420
89,5	80	133	312	346	170	349	387	208	387	414	245	424	453
97,5	85	146	341	378	186	381	422	227	422	451	267	462	494
106,5	95	159	372	412	203	416	461	248	461	493	292	505	540

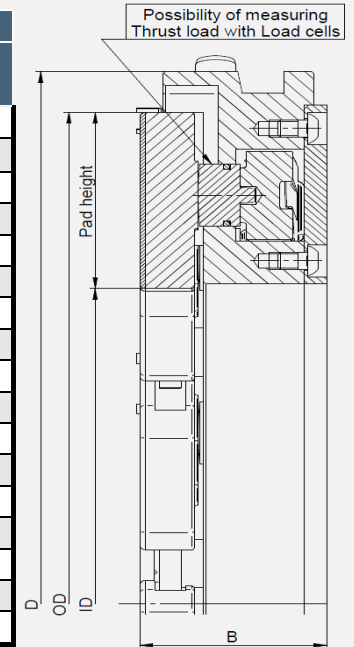

Pad height	Min. total width of bearing (B)	10 pads			11 pads			12 pads			13 pads			14 pads		
		ID	OD	D	ID	OD	D	ID	OD	D	ID	OD	D	ID	OD	D
26	26	85	137	154	96	148	167	107	159	176	118	170	188	129	181	200
28,5	28	92	149	168	104	161	181	117	174	193	129	186	206	141	198	219
31	30	101	163	184	114	176	198	127	189	209	140	202	224	153	215	238
34	32	109	177	200	124	192	216	138	206	228	152	220	244	167	235	260
37	36	121	195	220	137	211	238	153	227	251	168	242	268	184	258	286
40	38	128	208	235	145	225	254	162	242	268	179	259	287	196	276	306
44	42	144	232	255	162	250	275	181	269	290	200	288	311	219	307	331
48,5	45	155	252	277	175	272	299	196	293	316	216	313	338	236	333	359
53	50	169	275	302	192	298	327	214	320	345	236	342	369	259	365	394
58	53	184	300	330	208	324	356	231	347	374	255	371	400	279	395	426
63	60	201	327	359	228	354	389	253	379	409	279	405	437	306	432	466
68,5	64	217	354	384	246	383	415	273	410	439	302	439	470	330	467	497
75	68	235	385	417	267	417	452	296	446	478	327	477	511	358	508	541
82	72	259	423	458	293	457	495	327	491	526	361	525	562	396	560	597
89,5	80	282	461	493	319	498	532	357	536	575	394	573	615	431	610	650
97,5	85	308	503	538	349	544	582	390	585	628	430	625	671	471	666	710
106,5	95	336	549	587	381	594	635	430	643	690	474	687	737	519	732	780

All dimensions in mm

www.gtw.cz

e-mail: sales@gtw.cz; tel.: +420 377 923 649

We reserve rights to change dimensions

15.08.2023, Rev.00